## **TECKENTRUP 62 SWING SECURE.**

The secure & stylish swing garage door for your home.





Secured by Design



Tested to LPS 1175 Issue 8 A1 (SR1)





#### TECKENTRUP 62-1 SWING SECURE

Single leaf versions for side access to your garage.

#### **TECKENTRUP 62-2 SWING SECURE GARAGE DOOR**

Double leaf versions provide easy access and performance comparable to your front door.





Our doors are independently tested and certified to EN14351-1 and all current safety legislation and carry a CE mark.





Tested to LPS 1175 Issue 8 A1 (SR1)



#### A NEW AND SECURE LOOK FOR GARAGES

The main entrance doors to homes are becoming more attractive and high performance. Hinged swing garage doors, whilst still popular, are limited in choice and performance.

The Teckentrup 62 Swing Secure brings crisp aesthetics and comparable performance to the main entrance door; Thermal Transmittance, Resistance to Windload, Watertightness, Air Permeability and Operating Forces are all certified in these high performance doors.

Add to this, the option of certified security to the Secured by Design Police Preferred Specification, tested to LPS 1175 Issue 8 A1 (SR1) and Teckentrup 62 Swing Secure garage doors are a classic, updated for today's homes. The superb build quality of the double leaf doors is complemented by matching single leaf doors for side or rear access to

your garage space.



## STYLE YOUR DOOR




#### HANDLES

A black lever handle and security keyed cylinder is the standard configuration for all doors. Stainless steel is available as an option - see image on page 6.

Stainless steel pull handles in two lengths can also be added in singles or pairs to add a striking contemporary look to your door.












1500mm 'D' Handle Pair

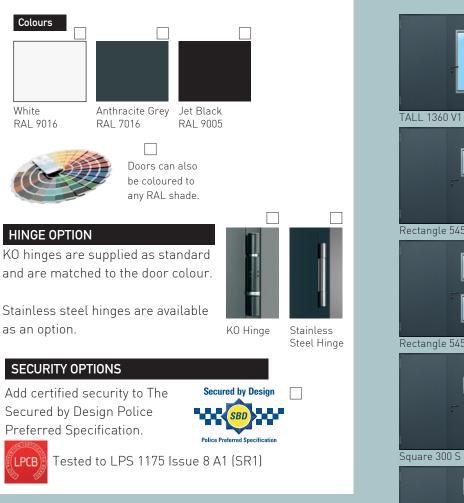

#### HIGH GRADE WINDOW OPTIONS

All window units are double glazed and available with clear glazing for vision or frosted glazing to allow light in with privacy.



Glazing sizes: 230mm x 1360mm 545mm x 354mm 300mm x 300mm 300mm diameter

Windows are available with colour matched inserts and fixings or with Anodised Aluminium surrounds with concealed fixings.



Rectangle	545 H2
	-

Rectangle 545 H2P

Rectangle	e 545 H3



HOME | BUILD | UALITY

# HIGH QUALITY BUILT TO LAST

### U VALUE 1.4 Wm<sup>2</sup>K\*

The U value of the door confirms its insulation capability. The value is for a complete door with frame and is exceptionally low (which is good!).



#### AUTOMATIC QUALITY

Every Teckentrup 62 Swing Secure is made to order in our automated production facility that operates to quality procedures audited to BS EN ISO 9001: 2008. We care about the environment too - this is why all of our products are certified in accordance with the Environmental Product Declaration (EPD).

0



Image shows

the stainless steel handle option.

\*U value

includes a 3mm

clearance gap under the door.

CE0432

4

ROSTFREI

#### **CERTIFIED PERFORMANCE**

The door and frame are CE marked and have been independently tested to have the following impressive characteristics:

Insulation (Thermal Transmittance)		
Resistance to Windload		
Watertightness		
Air Permeability		
Operating Forces		
Operating Cycles		
Security (optional)		

EN 13241-1 B: 1.4 Wm<sup>2</sup>K EN 12424:Class 2 EN 12425:Class 2 EN 12426:Class 2 EN 12604: 150N EN1191 C5 (200,000)

Secured by Design Police Preferred Specification



Tested to LPS 1175 Issue 8 A1 (SR1)





Each door is supplied with a pair of Security keys. Security keys add extra security by preventing unauthorised copying. They cannot be cut by anyone other than the issuer of the key - Teckentrup.

For improved weather protection, a

stepped aluminium threshold with

a bulb weather strip is provided.

The door leaves close against the raised weather strip creating an

improved barrier to dust and debris.

The threshold is DDA compliant for



The inactive leaf is secured with flush bolts to the top and bottom of the leaf.



LPCB



### HOLD OPEN STAYS

Double doors have foot activated stays to hold the door in the open position.



Please note - stays are not designed for high wind applications.

#### RAIN-GUARD

An anodised aluminium rainguard is supplied with all doors to help limit water ingress at the top of the door.



#### FRAMES

wheelchair access.


THRESHOLD

Every door is supplied with a frame. A 'block frame' is the standard option with two variants, the 'Corner Frame' and the 'Corner Counter Frame'. Each frame is made from heavy gauge corrosion protected steel and provides a stable platform for the door to operate.



**BLOCK FRAME** 

The block frame is the standard frame design. Provided with Rockwool filling.





CORNER FRAME

The innovative corner frame wraps around the front corner of the garage opening providing a neat edge. Its slim profile also gives an additional 56 mm drive through width compared to a block frame.

Requires back-filling with a foam sealant.



CORNER COUNTER FRAME

The counter frame wraps around the front and back corner of the garage opening providing a neat edge. Its slim profile also gives an additional 56mm drive through width compared to a block frame.

Requires back-filling with a foam sealant.

The FB Frame option allows for a flush finish between door lip, frame and wall finish on Corner and Corner Counter frames in new openings that are rendered after the door is installed. The FB option also provides a flush finish on block frames that are fixed at the front edge of the garage opening reveal.



Teckentrup is a family business with operations throughout the world. In the UK Teckentrup is based in Warrington, Cheshire. Teckentrup 62 Swing Secure is available through a national network of independent Garage Door Specialist installers.

Teckentrup offers more than garage doors: We provide solutions and have set three quality standards for our garage doors:



#### Warranty

2-year manufacturer's warranty residential use 1-year manufacturer's warranty commercial use

- on panels against rust penetration from inside to outside
- on material and manufacturing flaws of all non-moving parts of the frame that are verifiably unusable or whose usability is substantially compromised
- on floor seal, intermediate seals and frame seals against rotting

The guarantee does not apply to doors which are subjected to extreme conditions, e.g. corrosive influences resulting from use in a coastal climate with high salt content.

Terms and conditions apply, visit www.teckentrup.co.uk for details.





#### Design

## We combine ease of use with aesthetics.

Good design uses innovative technology to make using a product intuitive and effortless. Teckentrup 62 Swing Secure garage doors offer a wide range of design options that will transform the look of your home and the way you use your garage space.



#### Safety & Security

#### We combine security with safety.

Our products are designed to provide peace of mind with both physical security and the knowledge that durability and safe operation are inherent.



Service

#### We combine speed with reliability.

The Teckentrup team and our network of Garage Door Specialist installers love to make your new door a pleasure to own. From planning to installation. You'll always receive expert advice and the best service for installation, maintenance and aftercare.



Teckentrup UK Limited, Units 2-4, Opus 9 Industrial Estate, Woburn Road, Winwick Quay, Warrington WA2 8UE

www.teckentrup.co.uk t: 01925 924 050 f: 08701 314 843 e: sales@teckentrup.co.uk







WWW.TECKENTRUP.CO.UK